

QUIKRETE Repair



Quick - Setting Cement Specially formulated to set in approximately 10 minutes. Can be molded or sculpted into place.

Use for:

- Making concrete repairs where rapid setting is required
- Ideal for repairing broken edges of concrete steps & curbs

Lbs.
6 lb. pails
20 lb. pails
50 lb. bags



Anchoring Cement A pourable cement that develops strength greater than concrete. Expands as it hardens and sets in 15 - 45 minutes. Just add water.

Use for:

- Setting bolts, handrails, or anything metal to be anchored in concrete
- Ideal for repairing loose wrought iron railings

Lbs.
6 lb. pails
50 lb. pails

Hydraulic Water - Stop Cement Special formula allows product to obtain high strength and rapid setting while repelling water.

Use for:

- Blocking running water or leaks in cracked masonry or concrete surfaces




Lbs.
6 lb. pails
50 lb. pails

Gray Concrete Crack Seal A uniformly blended latex emulsion, specially designed to adhere to all concrete surfaces. No mixing is required. Just pour from the bottle. Blends in with the natural color of concrete.

Use for:

- Repairing cracks in concrete sidewalks, patios and driveways.

Lbs.
1 qt. bottle

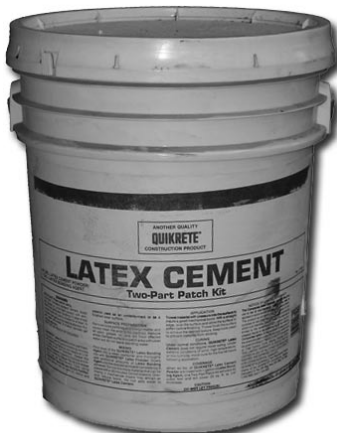

QUIKRETE Latex Cement - is a 2-part material used for patching and smoothing concrete and masonry surfaces for thin repairs of 1/16" (1.6 mm) to layers a full 1/4" (6.4 mm) thick. Latex Cement can be used for interior or exterior applications as an underlayment or as a finished wear surface. It is designed for long lasting durable repairs and overlay. Compressive strength - 5000 psi.

5gal - pails
